

SINGLE-MPPT STRING INVERTER WITH A GREATER POWER DENSITY

INGECON® SUN 300TL

Great output power

Featuring a greater output power, the new INGECON® SUN 300TL is able to drastically reduce the number of inverters required for designing a PV power plant.

Cabling cost reduction

Thanks to the innovative design, this inverter allows to use DC harnessing cable solutions. As a consequence, it reduces the global labour and cabling cost.

Higher flexibility and power density

The highest flexibility thanks to its maximum DC voltage (1,500 V) and to its wide voltage range MPP. Awesome power density, with up to 300 kW.

Long-lasting and rugged design

Aluminium casing, especially conceived for indoor and outdoor applications (IP66). The INGECON® SUN 300TL have been designed to guarantee a long life expectancy and to withstand extreme temperatures.

Wi-Fi communication as standard

The inverter features Wi-Fi communication as standard. This Wi-Fi interface is used to commission the inverter through the

INGECON® SUN Monitor App, available for iOS and Android. A wizard guides the user through the entire start-up process.

SPE (Single Pair Ethernet)

The inverter features SPE communication as standard. Using SPE, the communication with the inverters can be established up to 1,000 meters. Moreover, these inverters enables daisy chain connection. Thus, several inverters can be connected to the same SPE line. The versatility and possibilities offered by the SPE are an important improvement at the plant's communication network.

Grid support

The INGECON® SUN 300TL has been designed to comply with the grid connection requirements in different countries, contributing to the quality and stability of the electric system. These inverters therefore feature a low voltage ride-through capability, and can deliver reactive power and control the active power delivered to the grid

Remote monitoring

The inverter can be monitored with the www.ingeconsunmonitor.com website or with the INGECON® SUN Monitor App.



INGECON® SUN 300TL

Optimized design for stacked mounting arrangement

The inverter has been designed to be mounted in the string station as a virtual central power station, reducing the size and facilitating installation and cabling connections.

Integrated components

DC surge arresters, type II	✓
AC surge arresters, type II	✓
AC quick connectors	✓
Wi-Fi communication	✓
SPE (Single Pair Ethernet) communication	✓



MAIN FEATURES

- 1 MPPT.
- DC terminal connection up to 400 mm².
- PID recovery.
- Reactive power capability.
- Reactive power injection at night.
- Low-voltage ride-through capability.
- 99.05% maximum efficiency.
- Single Pair Ethernet and Wi-Fi communications.
- Integrated Webserver.
- Software INGECON® SUN Monitor for PV plant monitoring.
- Suitable for indoor and outdoor installations (IP66).
- High temperature performance.



PROTECTIONS

- Shortcircuits and overloads at the output.
- Anti-islanding with automatic disconnection.
- Insulation faults.
- AC overvoltages with type II surge arresters.
- DC overvoltages with type II surge arresters.

BENEFITS


- Greater power density.
- Harnessing cable solutions.
- Greater cost-effectiveness thanks to the cabling cost reduction.
- High availability compared to central inverters.
- High efficiency rates.
- Easy maintenance.

	300TL							
	400 V	600 V	615 V	630 V	645 V	660 V	675 V	690 V
Input (DC)								
MPP voltage range ⁽¹⁾	622 - 1,300 V	933 - 1,300 V	957 - 1,300 V	980 - 1,300 V	1,003 - 1,300 V	1,027 - 1,300 V	1,050 - 1,300 V	1,073 - 1,300 V
Maximum voltage	1,500 V							
Maximum current	278							
Number of inputs (MPPT)	1							
Output (AC)								
Rated power	173 kVA	260 kVA	266 kVA	273 kVA	279 kVA	286 kVA	292 kVA	299 kVA
Maximum current	250 A							
Ambient temperature for rated power	45 °C							
Rated voltage	400 V	600 V	615 V	630 V	645 V	660 V	675 V	690 V
Frequency	50 / 60 Hz							
Type of grid	TN / TT / IT			IT				
Power factor adjustable ⁽²⁾	Yes, 0 - 1 (leading / lagging)							
THD (Total Harmonic Distortion) ⁽³⁾	<3%							
Efficiency								
Maximum efficiency	99.05%							
Euroefficiency	98.60%							
General information								
Cooling system	Forced ventilation							
Air flow	900 m³/h							
Stand-by consumption	25 W							
Operation temperature	-30 °C to 60 °C							
Relative humidity (non-condensing)	0 - 100%							
Protection class	IP66 / NEMA 4							
Residual current monitoring unit	Yes							
Maximum operating altitude	4,000 m.a.s.l. (for installations beyond 1,000 m.a.s.l., please contact Ingeteam's solar sales department)							
Connection	AC quick connectors: 95 - 120 mm² DC connection: up to 2 x 400 mm²							
Marking	CE							
EMC and safety standards	EN 61000-6-1, EN 61000-6-2, EN 61000-6-3, EN 61000-6-4, EN 61000-3-2, EN 61000-3-3, EN 61000-3-11, EN 61000-3-12, EN 62109-1, EN 62109-2, IEC62103, EN 50178, FCC Part 15, IEC60068-2-1:2007, IEC60068-2-2:20007, IEC60068-2-14:2009, IEC60068-2-30:2005, IEC62116, IEC61683 y EN50530							
Grid connection standards	DIN V VDE V 0126-1-1, EN 50439, EN 50549, CEI 0-21, CEI 0-16 VDE-AR-N 4105:2011-08, P.O.12.3, BDEW, IEC 62116, IEC 61727, UNE 206007-1, ABNT NBR 16149, ABNT NBR 16150, Brazilian Grid Code, South African Grid Code, Chilean Grid Code, DEWA 2.0, Jordanian Grid Code, G99, VDE-AR-4110, NTS de REE, Directive EU 2016/631							


Notes:

- (1) Vmpp.min is for rated conditions (Vac=1 p.u. and Power Factor=1).
- (2) Extended adjustment range for nominal working points.
- (3) For rated AC power and voltage in accordance with IEC 61000-3-4.


Efficiency INGECON® SUN 300TL

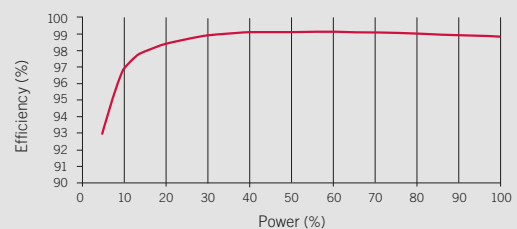

Size and weight (mm)



300TL
105 kg.

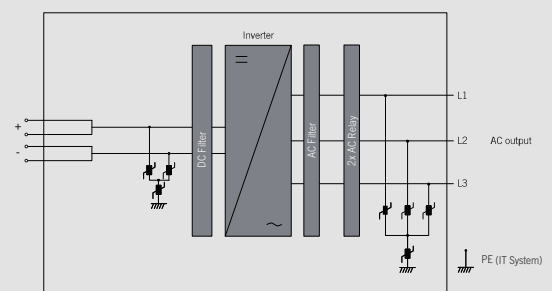



Ingeteam

Ingeteam Power Technology, S.A.
Avda. Ciudad de la Innovación, 13
31621 Sarriguren (Navarra) - Spain
Tel.: +34 948 288 000
Fax: +34 948 288 001
e-mail: solar.energy@ingeteam.com

Ingeteam S.r.l.
Via Emilia Ponente, 232
48014 Castel Bolognese (RA) - Italy
Tel.: +39 0546 651 490
Fax: +39 054 665 5391
e-mail: italia.energy@ingeteam.com

Ingeteam SAS
La Naurouze B - 140 rue Carmin
31670 Labège - France
Tel.: +33 (0)5 61 25 00 00
Fax: +33 (0)5 61 25 00 11
e-mail: france@ingeteam.com

Ingeteam INC.
3550 W. Canal St.
Milwaukee, WI 53208 - USA
Tel.: +1 (414) 934 4100 / +1 (855) 821 7190
Fax: +1 (414) 342 0736
e-mail: solar.us@ingeteam.com

Ingeteam, a.s.
Technologická 371/1
70800 Ostrava - Pustkovec
Czech Republic
Tel.: +420 59 747 6800
Fax: +420 59 732 6899
e-mail: czech@ingeteam.com

Ingeteam Shanghai, Co. Ltd.
Shanghai Trade Square, 1105
188 Si Ping Road
200086 Shanghai - P.R. China
Tel.: +86 21 65 07 76 36
Fax: +86 21 65 07 76 38
e-mail: shanghai@ingeteam.com

Ingeteam, S.A. de C.V.
Leibnitz Ext 13 Int 1102, Colonia Anzures
11590 - Miguel Hidalgo
Ciudad de México - Mexico
Tel.: +52 81 8311 4858
Fax: +52 81 8311 4859
e-mail: northamerica@ingeteam.com

Ingeteam Ltda.
Rua Estácio de Sá, 560
Jd. Santa Genebra
13080-010 Campinas/SP - Brazil
Tel.: +55 19 3037 3773
e-mail: brazil@ingeteam.com

Ingeteam Pty Ltd.
Unit 2 Alphen Square South
16th Road, Randjiespark
Midrand 1682 - South Africa
Tel.: +2711 314 3190
Fax: +2711 314 2420
e-mail: southafrica@ingeteam.com

Ingeteam SpA
Los militares 5890, Torre A, oficina 401
7560742 - Las Condes
Santiago de Chile - Chile
Tel.: +56 2 29574531
e-mail: chile@ingeteam.com

Ingeteam Power Technology India Pvt. Ltd.
2nd Floor, 431
Udyog Vihar, Phase III
122016 Gurgaon (Haryana) - India
Tel.: +91 124 420 6491-5
Fax: +91 124 420 6493
e-mail: india@ingeteam.com

Ingeteam Sp. z o.o.
Ul. Koszykowa 60/62 m 39
00-673 Warszawa - Poland
Tel.: +48 22 821 9930
Fax: +48 22 821 9931
e-mail: polska@ingeteam.com

Ingeteam Australia Pty Ltd.
iAccelerate Centre, Building 239
Innovation Campus, Squires Way
North Wollongong, NSW 2500 - Australia
Tel.: +61 429 111 190
e-mail: australia@ingeteam.com

Ingeteam Panama S.A.
Av. Manuel Espinosa Batista,
Ed. Torre Internacional
Business Center, Apto./Local 407
Urb.C45 Bella Vista
Bella Vista - Panama
Tel.: +50 761 329 467

Ingeteam Service S.R.L.
Bucuresti, Sector 2,
Bulevardul Dimitrie Pompeiu Nr 5-7
Cladirea Hermes Business
Campus 1, Birou 236, Etaj 2
Romania
Tel.: +40 728 993 202

Ingeteam Philippines Inc.
Office 2, Unit 330, Milelong Bldg.
Amorsolo St. corner Rufino St.
1230 Makati
Gran Manila - Philippines
Tel.: +63 0917 677 6039

Ingeteam Power Technology, S.A.
Level 1, Al Bateen Tower C6 Bainunah
ADIB Building, Street 34
PO BOX 30010 - Abu Dhabi
United Arab Emirates
Tel.: +971 50 125 8244

Ingeteam Vietnam Ltd.
Spaces - 28A Tran Hung Dao Street
Phan Chu Trinh Ward
Hoan Kiem District
Ha Noi City - Vietnam
Tel.: +84 24 71014057
e-mail: vietnam@ingeteam.com

Ingeteam Uruguay, S.A.
Avenida 18 de Julio, 1474, Piso 12
11200, Montevideo, Uruguay
Tel.: +598 934 92064